


**HM 50**

- 
- 
- 4가 가 : , , , ,
- 20

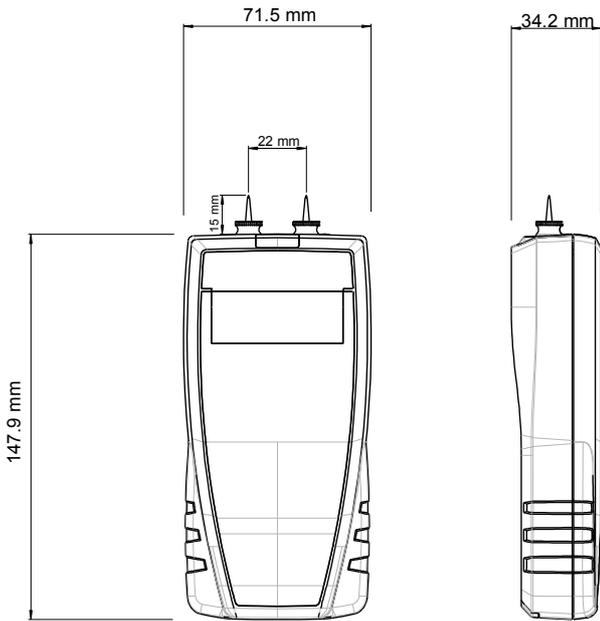

: ABS

: IP54

:  
1 line LCD 1 x 5 digits.  
Size : 50 x 20 mm

**Height of digits :**  
Values : 9.2 mm  
Units : 4.7 mm

: 200 g ( )



	( )			
M1		, , 가 , , ,	From 10 to 50 %	± 1 %
M2		, , , ,	From 9 to 50 %	± 1 %
M3	,		From 0 to 15 %	± 1 %
M4			From 0 to 15 %	± 1 %

	From 0 to +50 °C
	From -20 to +80 °C
	4 batteries AAA LR03 1.5 V
	180
	Directives CEM 2004/108/CE and NF EN 61010-1

\* All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation

: , (2 1SET), ,



- 
- ABS
- 
- (2 1SET)



(02-338-0023)

가 1

- **On/Off/Hold**  
HM50
- **Select** 가
- 
- 

가

Lo

- **On/Off/Hold**
- **Select** 가
- **On/Off/Hold**

**Hold** 가

« Select »

« On/Off/Hold »



- 
- 
- 가 .AAA LR03 1.5 V.

20

OFF

( )

< 15 %		< 2 %		< 2 %	
From 15 to 30 %		From 2 to 4 %		From 2 to 4 %	
> 30 %		> 4 %		> 4 %	



Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance to 2002/96/CE guidelines relating to WEEE.

[www.kimo.fr](http://www.kimo.fr)

Distributed by :



**EXPORT DEPARTMENT**  
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29  
e-mail : [export@kimo.fr](mailto:export@kimo.fr)