


MP 50 – MP 51

-
-
-
-

20

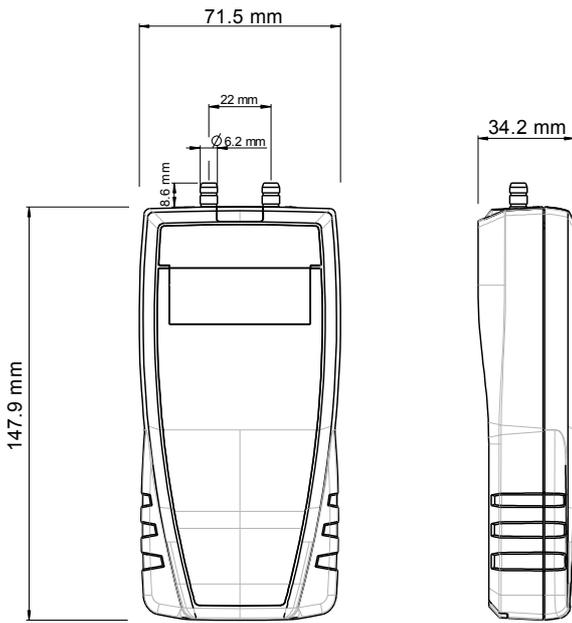

: ABS

: IP54

:
1 line LCD 1 x 5 digits.
Size : 50 x 20 mm

Height of digits :
Values : 9.2 mm
Units : 4.7 mm

: 200 g ()



	MP50	MP51
	Pa, mmH ₂ O, inWg, daPa	mmH ₂ O, kPa, inWg, mbar, mmHg, daPa
	From -1000 to +1000 Pa	From -1000 to +1000 mmH ₂ O
	±0.5% of reading ±2 Pa	±0.5% of reading ±2 mmH ₂ O
	1 Pa	From -200 to +200 mmH ₂ O : 0.1 mmH ₂ O Beyond : 1 mmH ₂ O
	T63 = 0.3	
	From 0 to +50 °C	
	From -20 to +80 °C	
	4 batteries AAA LR03 1.5 V	
	180	
	Directives CEM 2004/108/CE and NF EN 61010-1	

* All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation

: , , 2x1



-
- ABS
-



(02-338-0023)

가 1

- **On/Off/Hold**
MP50 MP51

- **Select** 가
: MP50 : Pa, mmH20, inWg, daPa.
MP52 : mmH20, kPa, in Wg, mbar, mmHg, daPa.

-
- **Select**

- **On/Off/Hold**
Hold 가
- **On/Off/Hold**

-
-
- 가 . AAA LR03 1.5 V.

« Selection »

« On/Off/Hold »



20

OFF



Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance to 2002/96/CE guidelines relating to WEEE.

www.kimo.fr

Distributed by :



EXPORT DEPARTMENT
 Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29
 e-mail : export@kimo.fr