

SL 200

■ SL 200

- : 1 W/m² ~ 1300 W/m²
- : 1 Wh/m² ~ 500 kWh/m²
- : 0.5
- : 5%
- (W/m²): 1 (60)
- : 31 , 44640
- : 1000
- : -10 ~ +50
- : -10 ~ +55
- : 58 x 120 x 33mm
- : 72
- ()
- : 3 LR3-AAA

RoHS



- : 400 ~ 1100nm (가)
- : 100mv (1000W/m²)
- : 80 °
- : +0.1% /
- : 1cm²
- : -30 ~ +60
- : 100%RH
- UV : excellent (PMMA)
- : photovoltaic
- ; polycrystallin silicon
- : PMMA
- : PMMA &
- : 60g
- : 30 x 32mm
- : 1.25 m



(, , , / ,)
(Wh/m²)

■ SL 200



- ,
- 가
- (,)
-
-
- ()
- (24)



* (WWR : World Radiometric Reference)



- ① ② ③
- ④ Del &
- ⑤
- ⑥ on/off

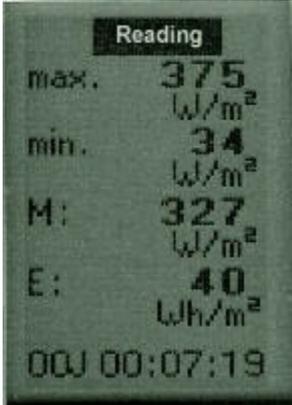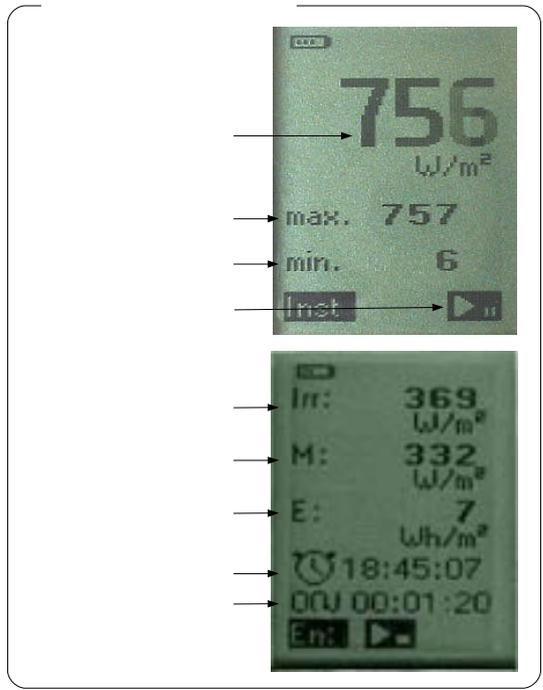

00H 24H

00H /24H



-
- -USB
- 3-LR3-AAA
-
-



-
- : 5m, 10m,
-

SET

